

MODEL: NSHS & NRHS SERIES

Capacity: 10 - 100 Ton

Stroke: 8 - 160 mm

Max. Working Pressure: 700 bar / 10,000 psi




FEATURES

- All cylinders are single acting with spring return.
- Pistons hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.
- Use in combination with hand / foot pumps (Page 18-28), and accessories (page 71-77)

NRHS SERIES

- Get the fast retracting speed by Tension spring design.
- Enlarged Plunger size provide stronger gripping force.

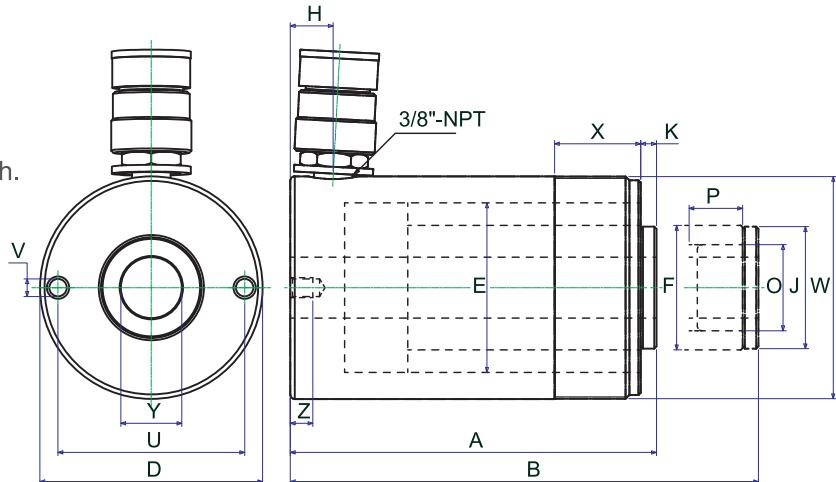

NSHS & NRHS SERIES, HOLLOW PLUNGER CYLINDERS

Model	Capacity (ton)	Stroke (mm)	Cylinder Effective Area (cm²)	Oil Cap (cm³)	A HEIGHT(mm) RETRACTED	B HEIGHT(mm) EXTENDED	D Ø mm	E Ø mm	F Ø mm	H mm	J mm	K mm	O Ø UN	P mm	U mm	V Ø UN	Z mm	W Ø UN	X mm	Y Centre Hole (Ø mm)	Weight (kgs)
NSHS120		8	18.5	14.8	60	68		54		12.5			3/4"-16	16			9				1.8
NSHS121	12	42	18.9	79	120	162	73	55		19			—	—			5/16"-18	23/4"-16	33	19.5	3.1
NSHS1211		42	18.9	79	120	162		55		19			3/4"-16	16			12.7				3.1
NSHS123		76	18.9	143.2	184	260		55		19			—	—			12.7				4.5
NSHS202	20	51	34	173	162	213	98.5	75	55	19	54	7	19/16"-16	25	82.6	3/8"-16	9.4	37/8"-12	38	27	7.5
NSHS206		155	34	527	306	461															13.5
NSHS302	30	65	47.8	310	178.5	243.5	117	90	65	21.5	59.9	0.5	17/8"-16	25	92	3/8"-16	14	41/2"-12	42	34	20.4
NSHS306		160	47.8	763	330	490															20.4
NSHS603	60	76	89.6	680	247.5	323.5	158.6	125	90	32	89	12.5	23/4"-16	25	130	1/2"-13	14	61/4"-12	50	54	26.8
NSHS606		152	89.6	1360	323.5	475.5															34
NSHS1003	100	76	143	1085	254	330	213	165	125	38	125	12	4"-16	30	178	5/8"-11	19	83/8"-12	60	79	50.1
NRHS102	10	63.5	14.9	42.6	135.5	199	76.2	60	52.4	25.4	52	0.5	13/4"-12	15	60.3	1/4"-20UNC	10	—	—	19.5	4
NRHS108		203	14.9	302.3	287.5	490.5															8.5
NRHS302	30	63.5	42.7	271	158.5	222	121	95	79.9	30	79.5	1.5	23/4"-12	20	95.3	7/16"-20UNF	14	43/4"-20UN	38	33.3	11.4
NRHS306		152.5	42.7	651	247.5	400															11.4