

# ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT



## Performance

Platform Height—Elevated		
ERT2669	26'2"	8 m
ERT3369	32'8"	10 m
ERT4069	40'3"	12.3 m
ERT4769	47'	14.3 m
Platform Height — Lowered		
ERT2669	4'3"	1.3 m
ERT3369	4'9"	1.5 m
ERT4069	4'10"	1.5 m
ERT4769	5'4"	1.6 m
Platform Capacity (Single Extension)		
ERT2669	1,500 lb	680 kg
ERT3369	1,000 lb	453.59 kg
ERT4069	800 lb	363 kg
ERT4769	800 lb	363 kg
— Capacity on Deck Extension	300 lb	136 kg
No. Occupants (Indoor/Outdoor)		
ERT2669	4/4	
ERT3369	4/2	
ERT4069	3/2	
ERT4769	3/2	
Lift/Lower Time		
ERT2669	36/28 seconds	
ERT3369	42/33 seconds	
ERT4069	69/46 seconds	
ERT4769	81/55 seconds	
Maximum Drive Height	Full Height	
Weight (single extension w/out leveling jacks)*		
ERT2669	8,627 lb	3,913 kg
ERT3369	9,427 lb	4,276 kg
ERT4069	10,560 lb	4,790 kg
ERT4769	13,636 lb	6,194 kg
Drive Speed—Lowered	3.5 mph	5.6 km/h
Drive Speed—Elevated	0.5 mph	0.8 km/h
Max Tilt Rating (side-to-side)	2.5 Degrees	
Max Tilt Rating (fore & aft)	3 Degrees	
Gradeability		
ERT2669	40%	
ERT3369	40%	
ERT4069	35%	
ERT4769	30%	
Turning Radius (Inside)	83"	2 m
Turning Radius (Outside)	175"	4 m

\* Certain options or country standards will increase weight.

## Standard Specifications

### Power Source

Drive (2WD)	AC Electric Drive
-------------	-------------------

### Tires

Tire size (non-marking)	26 x 12 Foam Filled
-------------------------	---------------------

### Hydraulic System

Hydraulic Reservoir	13.2 gal (50L)
---------------------	----------------



## Standard Features

- 42in Roll-out Deck Extension
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable<sup>1</sup>
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tires
- 110V-AC Receptacle In Platform
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness

## Accessories & Options

- Hydraulic Leveling Jacks (Auto Level)
  - 26 x 12 Foam Filled Lug Tread Tires
  - 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
  - 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
  - Flashing Amber Beacon - LED
  - Dual Flashing Amber Beacons - LED
  - White Noise Backup Alarm
  - JLG CleanGuard
  - Special Hydraulic Fluids
  - Special Paint
  - ClearSky™
  - Operator Access Control
  - Generator Set (Kubota Stage V OC60-E4 6hp (4.5kW))
  - Heavy Duty Pipe Racks
1. ERT4769 Includes a Push-Button Manual Descent System


# ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT



## Dimensions

All dimensions are approximate.

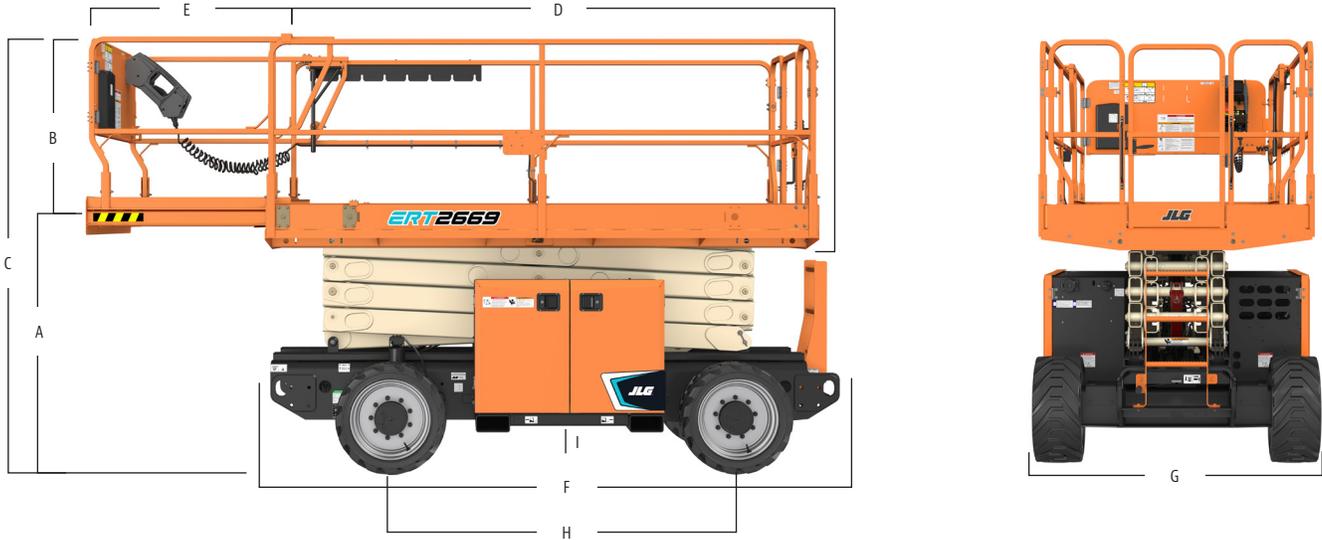

### Platform Height — Elevated

ERT2669	26'2"	7.98 m
ERT3369	32'8"	9.96 m
ERT4069	40'3"	14.1 m
ERT4769	47'	14.3 m

### A. Platform Height - Lowered

ERT2669	4'3"	1.3 m
ERT3369	4'9"	1.46 m
ERT4069	4'10"	1.46 m
ERT4769	5'4"	1.62 m

### B. Platform Railing Height\*

ERT2669	44.7"	1.14 m
---------	-------	--------

\*Fold Down Rails

### C. Overall Height

ERT2669	96.7"	2.46 m
ERT3369	102.9"	2.61 m
ERT4069	103"	2.62 m
ERT4769	109.1"	2.77 m

### D. Platform Dimensions

ERT2669	130.5" x 63"	3.3 x 1.6 m
---------	--------------	-------------

### E. Platform Extension

ERT2669	42"	1.07 m
---------	-----	--------

### F. Overall Machine Length

ERT2669	139"	3.53 m
---------	------	--------

### G. Overall Machine Width

ERT2669	69.3"	1.76 m
---------	-------	--------

### H. Wheelbase

ERT2669	81.3"	2.07 m
---------	-------	--------

### I. Ground Clearance

ERT2669	10.1"	25.7 cm
---------	-------	---------

Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.



## The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

Part No.: 3131510  
R0920  
Printed in USA

**JLG Industries, Inc.**  
1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
[www.jlg.com](http://www.jlg.com)

**An Oshkosh Corporation Company**