



MODEL:NSSS-SERIES

Capacity: 4.5 - 100 Ton

Stroke: 25.4 - 406 mm


Max. Working Pressure: 700 bar / 10,000 psi

- All cylinders are single acting with spring return.
- Pistons hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.

NSSS-SERIES, STANDARD CYLINDERS

Model	Capacity (ton)	Stroke (mm)	Oil Cap (cm³)	A HEIGHT(mm) RETRACTED	B HEIGHT(mm) EXTENDED	D Ø mm	E Ø mm	F Ø mm	H mm	J mm	K mm	O Ø UN	P mm	U mm	V Ø UNC	Z mm	W Ø UN	X mm	Weight (kgs)
NSSS51	4.5	26	17	110	136		28.6						14					1	
NSSS53		76	54	165	241		30						14					1.5	
NSSS55	5	127	90	216	343	38	30	25.4	19	25	6	3/4"-16	14	25	1/4"-20	14	1 1/2"-16	28	
NSSS57		183	129	273	456		30						16					2.4	
NSSS59		232	164	324	556		30						16					2.8	
NSSS101		25.4	36.5	90	115.4		42.8			—	—	#10-24UN	6.5					1.8	
NSSS102		51	73	121	172		42.8			40	6	1"-8	19					2.3	
NSSS104		101	145	171	272		42.8			40	6	1"-8	19					3.3	
NSSS106	10	152.5	242	247	399.5	57	45	38	19	40	6	1"-8	19	39	5/16"-18	13	2 1/4"-14	30	
NSSS108		203.5	323	298	501.5		45			40	6	1"-8	19					5.4	
NSSS1010		255.5	406	350	605.5		45			40	6	1"-8	19					6.4	
NSSS1012		305.5	486	400	705.5		45			40	6	1"-8	19					6.8	
NSSS1014		356.5	567	451	807.5		45			40	6	1"-8	19					8.2	
NSSS151		26.5	63	124	150.5				19									3.3	
NSSS152		52.5	125	149.6	202.1				19									4.1	
NSSS154		102.5	243	200	302.5				19									5	
NSSS156	15	153	363	271.6	424.6				25									6.8	
NSSS158		203.5	483	322	525.5	73	55	40		25		1"-8	25.4	47.7	3/8"-16	13	2 3/4"-16	30	
NSSS1510		254.5	604	373	627.5				25									8.2	
NSSS1512		305	724	424	729				25									9.5	
NSSS1514		355.7	845	474.6	830.3				25									10.9	
NSSS1516		406	824	523	829				25									11.8	
NSSS251		25.5	98	139.5	165													12.8	
NSSS252		51	196	165	216													5.9	
NSSS254		102	392	216	318													6.4	
NSSS256		158.5	610	273	431.5													8.2	
NSSS258	25	209.5	806	324	533.5	88	70	55	25	50	10.5	1 1/2"-16	25.4	58	1/2"-13	19	3 5/16"-12	50	
NSSS2510		260.5	1002	375	635.5													12.2	
NSSS2512		311	1196	425.5	736.5													14.1	
NSSS2514		361.5	1390.5	476	837.5													16.3	
NSSS308	30	209.5	925	387.5	597	103	75	60	57	50	10.5	1 1/2"-16	25.4	—	—	—	4"-12	50	
NSSS502		51	361	177	228													18.1	
NSSS504		101.5	719	229	330.5													15	
NSSS506	50	157.5	1116	283	440.5	127	95	80	33	70	3	—	—	95	1/2"-13	19	5"-12	55	
NSSS508		203	1446	349	552													23.1	
NSSS5010		260	1853	385	645													27.1	
NSSS5013		335.5	2377	461	796.5													30.4	
NSSS756	75	155	1752	285	440	152	120	95	30	70	3	—	—	—	—	—	5 3/4"-12	45	
NSSS7513		333.5	3770	491	824.5													29.5	
NSSS1002		50	715	238	288													59	
NSSS1004		100	1430	288	388													43	
NSSS1006	100	170	2432	358	528	177	135	105	40	70	3	—	—	139	3/4"-10	25	6 7/8"-12	45	
NSSS10010		260	3720	448	708													59	
																		72.6	


Accessories for NSSS series



For NSSS 5, 10, 15 & 25 Ton

Piston Clevis


Model	A	B	C	D	E	F
BCR5	28	41	14	16	16	25
BCR10	43	59	25	22.3	25	34
BCR15	43	62	25	22.3	25	37
BCR25	57	74	38	31.8	31	43

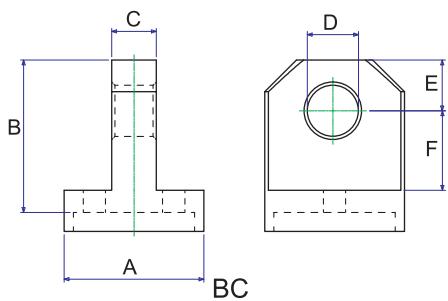

For NSSS 5, 10, 15 & 25 Ton

Base Clevis

Model	A	B	C	D	E	F
BC5	44	48	14	16	16	25
BC10	63	67	25	22.3	25	35
BC15	78.5	67	25	22.3	25	35
BC25	95	79	38	31.8	31	41

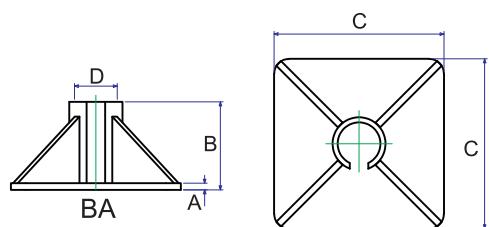


BA10 for NSSS102 through NSSS1014
BA25 for NSSS252 through NSSS2514


Cylinder Bases

Model	A	B	C	D
BA10	10	123	230	58
BA25	16	128	280	89

ATS10 & ATS25



ATS-100

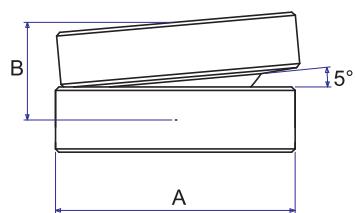

ATS10 for NSSS10T
ATS25 for NSSS25T through NSSS30T
ATS100 for NSSS50T through NSSS100T

Accessories Tilt Saddles

Model	A	B	C
ATS10	40	11.5	22.2
ATS25	50	14	36.3
ATS100	70	28.5	-