



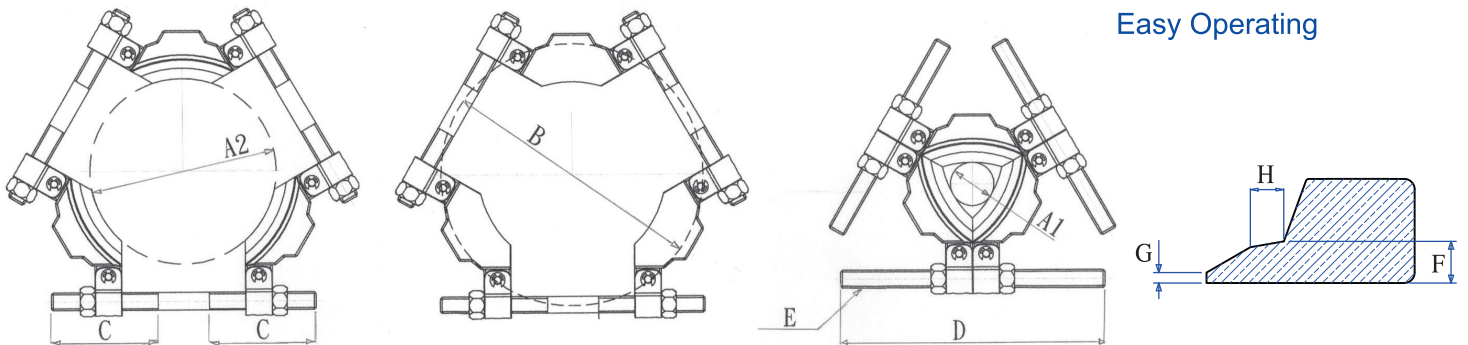

## USER-FRIENDLY & SAFE

- Unique & patented swivel design creates the max. spread.
- The tri-section construction provides the even force distribution, preventing bearing from locking and/or tilting on the shaft during dismantling.
- Suitable for combination usage with all three-armed hydraulic pullers.
- Available in a wide range, covering the most common shaft sizes.
- The firm grip behind inner and outer rings of bearing ensures the pulling force being transmitted through the moving parts and preventing the damaging of bearing.

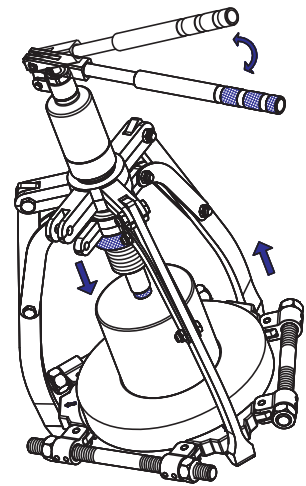

## SPECIFICATIONS ( mm )

Model No.	Available Shaft Dia.		Spread B (Max.)	C	D	E	F	G	H	Capacity (Ton)	Weight (kg)
	A1	A2									
ET3-160	26	160	216	105	240	5/8"-11UNC	8	2	6.5	6	3.5
ET3-210	50	210	280	117	285	7/8"-14UNF	10	2	9	8	5.5
ET3-340	90	340	460	175	430	1 1/4"-12UNF	14	2	8	20	18
ET3-495	140	495	660	235	610	1 3/4"-12UNF	20	2	12	30	45